


Sumline® Fca FTP Cat.6 Outdoor 4 x 2 x AWG23/1

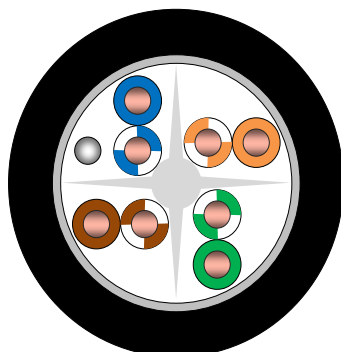

CPR classification

Fca

Code 211920042100003
 30.11.2017
 Rev.0

Description

Shielded symmetrical cable for data transmission in structured cabling networks (LAN), mainly in horizontal and secondary installations in interference-free environments. Bandwidth up to 350MHz. The screen of Alu / Cop. and drain CuSn protects you from external interference and acts as an anti-humidity barrier. External cover resistant to UV rays, allows external application and directly buried.

Design

Conductor:	Solid bare copper wire, 1 x 0,54mmØ (AWG23/1)
Insulation:	Special polyolefin compound
Color code:	See picture
Assembly:	Two cores wiring form a pair, paris laid up together
Screen:	Al/Cop. Fiol with CuSn drain wire
Outerh sheath:	Special PE, UV
Color:	Black (RAL 9005)
Outer diameter:	7,4
Weight (kg/km):	51

Technical data


Operating temperature:	-30 °C a +80 °C
Installation temperature:	-10 °C a +50 °C
Min. Bending radius:	6 x outer diameter
DC Loop resistance:	165 Ω/km @20 °C
Insulation resistance:	5 GΩ x km
Capacitance @ 1KHz:	50 ± 5 nF/km
Nominal voltage:	150 V
Characteristic impedance:	100 ± 5 Ω
NVP:	67%

Frequency MHz	1	4	10	16	20	30	45	60	80	100	120	150	180	200	220	250	280	300	320	350
Attenuation ≤ dB/100m	2,1	3,8	6,0	7,6	8,5	10,5	13,0	15,1	17,7	19,9	22,0	24,8	27,5	29,1	30,7	33,0	35,2	36,6	38,0	40,0
NEXT ≥ dB/100m	66,0	65,3	59,3	56,2	54,8	52,1	49,5	47,6	45,8	44,3	43,1	41,7	40,5	39,8	39,2	38,3	37,6	37,1	36,7	36,1
PS NEXT ≥ dB/100m	64,0	63,3	57,3	54,2	52,8	50,1	47,5	45,6	43,8	42,3	41,1	39,7	38,5	37,8	37,2	36,3	35,6	35,1	34,7	34,1
ELFEXT ≥ dB/100m	66,0	58,0	50,0	45,9	44,0	40,5	36,9	34,5	32,0	30,0	28,4	26,5	24,9	24,0	23,1	22,0	21,0	20,5	19,9	19,1
PS ELFEXT ≥ dB/100m	64,0	55,0	47,0	42,9	41,0	37,5	33,9	31,4	28,9	27,0	25,4	23,5	21,9	21,0	20,1	19,0	18,0	17,5	16,9	16,1
RL ≥ dB	20,0	23,0	25,0	25,0	25,0	23,8	22,5	21,7	20,8	20,1	19,5	18,9	18,3	18,0	17,7	17,3	17,0	16,8	16,6	16,3

Behavior in the case of fire

EN 50399	Fca
EN 60811-2-1	Oil Resistance

Packing in box



1.000m



The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Sumcab. The information is believed to be correct at the time of issue. Sumcab reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Sumcab.