


## Sumsave® Dca UTP Cat.6 4 x 2 x AWG23/1

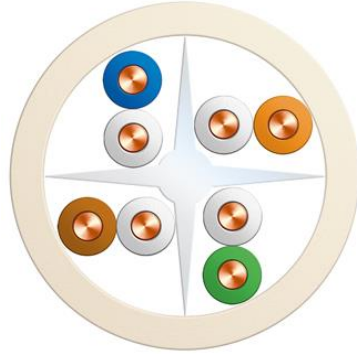

### CPR classification

**Dca** s2, d0, a1

Code 212020042100000  
 04.08.2017  
 Rev.0

#### Description

Unshielded symmetric cable for data transmission in structured cabling networks (LAN), mainly in horizontal and secondary installations in interference-free environments. Bandwidth up to 350MHz. Standard EN 50173-1: 2011, ISO / IEC 110801 Ed.2, ANSI / TIA 568-C.2

#### Design

Conductor: Solid bare copper wire, 1 x 0,54mmØ (AWG23/1)  
 Insulation: Special Polyolefin compound  
 Color code: See picture  
 Assembly: Four Pairs + non-metallic cross separator.  
 Outer sheath: Special Polyolefin compound, flame retardant  
 Color: Grey, RAL7035  
 Outer diameter (mm): 6,1  
 Weight (kg/km): 41

#### Technical data

Operating temperature: -30 °C to +70 °C  
 Installation temperature: -10 °C to +50 °C  
 Min. Bending radius: 4 x outer diameter  
 DC Loop resistance: 165Ω/km @20 °C  
 Insulation resistance: 5GΩ x km  
 Capacitance @ 1 kHz: 50 +/- 5 nF/km  
 Nominal voltage: 150V  
 Characteristic impedance: 100+/- 5 Ω  
 NVP: 69%

Frequency MHz	1	4	10	16	20	30	45	60	80	100	120	150	180	200	220	250	280	300	320	350
Attenuation ≤ dB/100m	2,1	3,8	6,0	7,6	8,5	10,5	13,0	15,1	17,7	19,9	22,0	24,8	27,5	29,1	30,7	33,0	35,2	36,6	38,0	40,0
NEXT ≥ dB/100m	66,0	65,3	59,3	56,2	54,8	52,1	49,5	47,6	45,8	44,3	43,1	41,7	40,5	39,8	39,2	38,3	37,6	37,1	36,7	36,1
PS NEXT ≥ dB/100m	64,0	63,3	57,3	54,2	52,8	50,1	47,5	45,6	43,8	42,3	41,1	39,7	38,5	37,8	37,2	36,3	35,6	35,1	34,7	34,1
ELFEXT ≥ dB/100m	66,0	58,0	50,0	45,9	44,0	40,5	36,9	34,5	32,0	30,0	28,4	26,5	24,9	24,0	23,1	22,0	21,0	20,5	19,9	19,1
PS ELFEXT ≥ dB/100m	64,0	55,0	47,0	42,9	41,0	37,5	33,9	31,4	28,9	27,0	25,4	23,5	21,9	21,0	20,1	19,0	18,0	17,5	16,9	16,1
RL ≥ dB	20,0	23,0	25,0	25,0	23,8	22,5	21,7	20,8	20,1	19,5	18,9	18,3	18,0	17,7	17,3	17,0	16,8	16,6	16,3	

#### Behavior in the case of fire

EN 50399 Dca S2, d0, a1  
 EN 60332-1 Flame retardant  
 EN 50268-2 Low smoke emission  
 EN 50267-2-3 Halogen free

#### Packing in box



305m



The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Sumcab. The information is believed to be correct at the time of issue. Sumcab reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Sumcab.